PTO/SB/09 (12-97)
Approved for use through 9/30/00. OMB 0651-0031
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless & displays a valid OMB control number

07	jc 5 3!
/12/(5 U.S
8	. PTO

STATEMENT	CLAIMING	SMALL	ENTITY	STATUS
(37 CFR 1.9(f)	& 1.27(b))	-INDEP	ENDENT	INVENTOR

Docket Number (Optional)

(37 CFR 1.9(f) & 1.27(b))-INDE			
Applicant, Patentee, or Identifier:	JAYNE HAUriso	n Robinson E	07
Application or Patent No.:			147
FiledorIssued:	2, 2000)
Filedor Issued: 111 Title: KPnmv	clamp	, S. C. L. S	
As a below named inventor, I hereby for purposes of paying reduced fees t	state that I qualify as an independer to the Patent and Trademark Office o	nt inventor as defined in 37 CFR 1.9 described in:	9(c)
the specification filed herewith	with title as listed above.		
the application identified above	e .		
the patent identified above.			
I have not assigned, granted, convey grant, convey, or license, any rights in under 37 CFR 1.9(c) if that person he business concern under 37 CFR 1.9(the invention to any person who wou ad made the invention, or to any con	ld not qualify as an independent invo cem which would not qualify as a s	entor
Each person, concern, or organization obligation under contract or law to as	on to which I have assigned, granted ssign, grant, convey, or license any l	l, conveyed, or licensed or am und rights in the invention is listed belo	eran w:
No such person, concern, or	r organization exists.		
Each such person, concern	, or organization is listed below.		
Separate statements are required fro stating their status as small entities. I acknowledge the duty to file, in this entitlement to small entity status primaintenance fee due after the date of	(37 CFR 1.27) application or patent, notification of ior to paying, or at the time of paying.	any change in status resulting in lo	ss of
Wase Hamsen Lobuse	NAME OF INVENTOR Signature of inventor	NAME OF INVENTOR Signature of inventor	in die versie
7/12/2000 Date	Date	Date	tolo-ro-min

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

- - ----

ReIssue Oath (Continued)

Applicant believes the original patent to be partly inoperative or invalid by reason of the patentee claiming more or less than the patentee had a right to claim in the patent.

Applicant believes that there was error in that Claim 1 defined his invention too narrowly.

Subsequently new Claim 7 and dependent Claims 8-11 have been added to broaden the scope of the invention Basis for these Claims can be found in Fig.2 and page 3 of the specification under Detailed Description of the Invention.

All errors that are being corrected in the Reissue application up to the time of filing of the Oath/
Declaration arose without any deceptive intention on the part of the applicant.

The Reissue oath fully complies with C.F.R. 1.63.

In accordance with MPEP 1416 applicant offers to surrender the original patent.

Respectfully Submitted;

Wayne Robinson, Applicant

By: Robert Halper- Reg. No. 30,536

Attorney for Applicant

THE KENNY CLAMP

Field of Invention

This invention pertains to a clamp, described as a "Kenny Clamp" whose function it is to bond the grounding electrode conductor to the enclosure of an electric service box, an auxiliary gutter or other related service equipment in accordance with the requirements of the 1996 National Electric Code and is particularly useful in household wiring.

Background of the Invention

Typically the grounding electrode conductor is fastened to a water pipe or made electrode and extends through an outlet in a service box where it is fastened to a bus bar with a screw.

Exemplary pf prior art ground connectors are as follows:

U.S. Pat. 2,710,381 teaches a device for bonding an electric ground wire to an electric outlet or switch box. This apparatus employs a grounding coupling or wedge wherein the electric wire to be connected to the box is placed in a groove and a stud screwed down upon it. A pin having contact with the ground wire also makes contact with the electric outlet box.

U.S. Pat. 3,009,128 teaches a coupling nut provided with a terminal connector for use in grounding equipment(not specified). The problem that was solved encompassed making the coupling nuts accessible. Heretofore the coupling nut was attached to the terminal in such a way that after it was in place, the terminal connector was inaccessible or very difficult to access. In the invention the coupling nut is cylindrical, has internal threads for threading to a conduit that projects into a service box. A terminal is mounted outside the fitting and has an opening through which a ground wire from equipment within the box can enter either way, and then a set screw is placed down on the wire either radially or axially.

U.S. Pat. 3,567,843 teaches an electric connector for attaching a waterproof jacketed armored cable to a junction box. The cable is rigidly gripped by the connector, which comprises a resilient grommet surrounding the jacket which is compressed between two threaded members. Stirrups straddle the inner and outer surfaces of the grommet at one end and contact both an exposed metal part of the cable and the connector to provide electric grounding. The connector is also provided with a section extending from the gripping surfaces to thread into the junction box.

U.S. Pat. 4,496,791 shows a spring biased connector for electrically bonding a device to a supporting wall. A flanged bushing is threaded into a push button housing mounted on a metal wall. A serrated spring is located between the flange of the bushing and the metal wall so that when the threaded fastener engages the bushing the spring is deflected into the wall and completes an electric circuit. This type of arrangement obviates use of a ground connection wire.

U.S. Pat. 5,181,860 teaches a plug and receptacle connector that is to be used on the control box of a machine tool, etc. An earth lug when mounted in an insulator causes a spring piece of the lug to pierce into a chromate film on a galvanized layer of a receptacle shell resulting in conductivity.

As can be seen there are a number of ways of making ground connections; however, none of the above cited grounded connections would satisfy the 1996 National Electrical Code, (hereinafter referred to as Code) which stipulates that a grounding electrode conductor entering a panel board, must be bonded to a metallic surface and must be connected to a grounding electrode, for example a metal water pipe or a metal rod driven into earth.. None of the devices mentioned in the above cited patents show such an arrangement. U. S. 2,710,381 bonds an electric ground wire to a metallic box but shows no connection to a grounding electrode. Similarly U.S. Pat. 3,567,843 shows electrical grounding of metal surface of a cable to an electrical junction box. In 4,496,791 there are features such as the spring jumper that might be likened to a grounding electrode conductor and the conductive wall might be a grounding electrode; however there is an additional element such as the push button considered to be a grounding conductor. Additionally the conductive wall would not satisfy the code as a ground electrode. As defined in the Code, "Grounding Conductor" is a conductor used to connect equipment or the grounded circuit of a wiring system to a grounding electrode or electrodes, that is the push button, mentioned above is the grounding conductor.. The "Grounding Electrode Conductor" is the conductor used to connect the grounding electrode to the equipment grounding conductor, to the grounded conductor or to both. The grounding electrode conductor as defined herein provides a low impedance path for service equipment and conductors during fault conditions, short circuits or ground faults. Under normal conditions electricity seeks to return to its source and complete a continuous circuit. This return path is often provided by white neutral wires that return current to the main service panel. A grounding electrode conductor provides an additional return path for electrical current. The ground electrode conductor is a safety feature. As stated above, it is designed to conduct electricity to its source, if current seeks to return to the service panel along a path other than the neutral wire.

Even if the ground wires of the aforesaid patents were to be considered to be grounding electrode conductors they would not satisfy the Code. The fact is that none of the grounding wires is designed to handle an excessive amount of fault current, for example in excess of 10,000 amperes in domestic households, for an extended period of time. This is significant for the reason that if there should be a failure in the circuit and an excessive amount of current is dumped onto this wire, it would be unable to control the situation.

Accordingly it is an object of this invention to provide a grounding electrode conductor to be connected to a panel board that conforms to the 1996 National Electrical Code.

It is another object of this invention to use a grounding electrode conductor that is rated for the available fault current.

It is also another object of this invention to facilitate the securement of the grounding electrode conductor to the panel board by use of a simple clamp.

Brief Description of the Drawing

Fig. 1 is a front section showing the assembly of a grounding electrode conductor to a

conventional electrical connector in the panel board

- Fig. 2 is a front section showing the assembly of the grounding electrode conductor to the improved electrical connector of the invention in the panel board.
- Fig. 3 is an enlarged view of the improved connector and a mechanism for fastening of the connector to the conductor.
 - Fig. 4a is an enlarged view of another embodiment showing another connector.
 - Fig. 4b is a view showing the connector secured to the panel board.
 - Fig. 5a is an enlarged view of a third embodiment of a connector.
- Fig. 5b is a similar view to Fig. 4b showing the third embodiment secured to the panel board. <u>Detailed description of the Preferred Embodiment</u>

Fig 1 shows the grounding electrode conductor 1 conventionally connected to a water pipe 2, the grounding electrode, and extending to an inlet 3 of a panel board 4. The conventional connector 5 consists of adjacent plates 6a, 6b through which conductor 1 passes. These plates contain spaced threaded perforations 7 through which pass screws 8 to secure the conductor 1 to the plates. One of the plates is welded to a bushing 8a that threads into an opening 9 in the panel board. The conductor 1 terminates in a bus bar 10 where it is secured by screw 11.

Fig. 2 shows the grounding electrode conductor 1 assembled as in Figure 1 except for the improved connector 12. The inlet 13 is now of a size to accommodate a high press cylindrical sleeve 14, which is either 1/2" or 3/4" and is made of copper or aluminum. For a 1/2" sleeve a #8 through #2 bare copper conductor, or a #6 through 1 bare aluminum would be used. For a 3/4 " sleeve, a #1 through 3/0 bare copper/aluminum conductor, or a #1 through bare aluminum would be used. The portion of the sleeve that enters the panel board is threaded and secured [therto] thereto by a lock nut 15. The conductor passes through the sleeve and as in Figure 2 ends in the bus bar 10 within the panel board, where it is secured by the screw 11. .The conductor 1 is clamped in the sleeve by crimping the sleeve as shown at 12a [As shown in] In Figure 3, a long handled plier 16 having arms 16a, wherein one arm has a projecting tooth 17a and the other arm has a corresponding groove 17b. The plier grasps the sleeve at several positions on its outer surface to compress the sleeve around the conductor. A second method shown in Figure 4 involves shaping the sleeve as a funnel 18 wherein the narrow portion of the funnel is slit into two legs 19 which are threaded the length of the funnel. Beyond the funnel there is a cylindrical threaded extension 20 that is fastened to the panel board and secured by a lock nut 21 adjacent the interior of the panel board. A threaded ring 22, having a diameter corresponding to the diameter of the narrow portion of the funnel, is slipped over the legs. As it is turned upward, it compresses the legs around the conductor. A flange 23 on the extension adjacent the exterior surface of the panel board limits the movement of the ring. While this is the preferred device used to clamp the conductor, a slight modification is shown in Figure 5a. The narrow portion of the funnel is divided into four legs. This modification is more appropriate where the grounding electrode conductor is of a larger diameter. In any case whichever device is used, both the

conductor and sleeve are rated for fault current.

The bonding circuit created between the grounding electrode conductor, its associated clamp and the grounding electrode is superior to any of the assemblies aforementioned including that shown in Figure 1. Bonding means joining all metal parts of the wiring system such as the panel board or other enclosures. It ensures having good, continuous metallic connections throughout the grounding system. While U.S. Pat. 4,496,791 discusses bonding according to the National Electric Code of 1981, the spring member therein that completes the bond is made of carbon steel, whereas the grounding electrode conductor and the associated clamp of this invention is made of aluminum or copper which are the acceptable materials of the National Electric Code of 1996; moreover the connector of U.S. Pat. 4,496,791 is for a pushbutton switch and would not be suitable for household wiring or commercial wiring. Similarly the clamp of Fig. 1 is of nondescript material, different than the copper material of the grounding electrode conductor. Thus in the event of a ground fault condition, the grounding electrode conductor could burn off because of the dissimilarity of materials.

While the invention has been shown and described in terms of specific embodiments, it will be obvious to those skilled in the art that various modifications and changes can be made therein without departing from the scope and spirit of the invention.

I Claim:

- 1. A grounding electrode conductor mounted in conformance to the National Electrical Code comprising:
- a) a grounding electrode having a grounding electrode conductor affixed thereto, said conductor extending from said grounding electrode to an electrical panel board,
- b) said board having an inlet to which a metal press sleeve connector can be affixed, said connector having a top and bottom with apertures for receiving said conductor, said top of said connector being threaded and secured to said inlet by a lock nut, said conductor having an end that passes through said aperture in said top and being fastened to a bus bar in said panel board
- c) compression means for clamping and securing said grounding electrode conductor to said metal press sleeve in electrical contact at the region of clamping.
- d) said sleeve being in the form of a funnel having a lower bifurcated, narrow end and a wider upper end having a cylindrical extension that threads into said inlet of said enclosure, said funnel having a threaded exterior surface and said compression means includes a threaded ring having an internal diameter that corresponds to that of said narrow bifurcated end, said ring being rotated so as to compress said bifurcated end of said funnel around said conductor.
- e) said press sleeve and said grounding electrode conductor being rated for available fault current.
- 2. A grounding electrode conductor as in Claim 1 wherein said connector and said conductor are aluminum.
- 3. A grounding electrode conductor wherein said connector and said conductor are made of copper.
- 4. A grounding electrode conductor as in Claim 1 wherein said compression means includes a long handled plier having two arms, wherein one arm has a projecting tooth and the other of said arms has a corresponding groove, said arms being placed at spaced points around said connector, to crimp said connector so as to contact and clamp said conductor thereto.
- 5. A grounding electrode conductor as in Claim 1 wherein said sleeve is in the form of a funnel having a lower, bifurcated, narrow end and a wider upper end having a cylindrical extension that threads into said inlet of said panel board, said funnel having a threaded exterior surface said compression means includes a threaded ring having an internal diameter corresponding to that of said bifurcated narrow end, said ring being rotated so as to compress said bifurcated ends of said funnel around said conductor.
- 6. A grounding electrode conductor as in Claim 5 wherein said lower end of said funnel is divided

into four legs. .

- 7. A grounding electrode as in Claim 1 wherein said connector and said conductor are adapted for a household or commercial wiring system
- 8. A device for bonding a grounding electrode conductor to the enclosure of an electric service box in conformance to the National Electric Code comprising
- a) grounding electrode having a grounding electrode conductor affixed thereto, said conductor extending from said grounding electrode to said enclosure.
- b) said enclosure having an inlet to which a metal press sleeve conector can be affixed, said connector having a top and bottom with an aperture thereat for receiving said conductor, said top of said connector being threaded and secured to said inlet by a lock nut, said conductor having an end that passes through said aperture in said top and being fastened to a bus bar in said enclosure.
- c) compression means for clamping and securing said grounding electrode conductor to said metal press sleeve in electrical contact at the region of clamping.
- d) said sleeve being substantially in the form of a cylinder having a threaded extension that passes through said inlet of said enclosure, said compression means includes a long handled plier having one toothed arm and another arm having a corresponding groove, said plier grasping said sleeve at spaced sections thereof to crimp said sleeve
- e) said press sleeve and said grounding electrode conductor being rated for available fault current.
- 9. A device as In Claim 8 wherein said connector and said conductor are made from a metal selected from copper and aluminum.
- 10 A device as in Claim 8 wherein said connector and said conductor are adapted for a household or commercial wiring system.
- 11. wherein said sleeve has a diameter of 1/2" or 3/4' said conductor has a dimensionwithin the range of #8-#2 for a 1/2" sleeve and within the range of #1-3/0 for a 3/4" sleeve.

ABSTRACT OF THE DISCLOSURE

A grounding electrode conductor bonded to the metallic surface of a panel board by a press sleeve connector mounted on said panel board. A clamp is used to contact and secure the conductor to the connector. Both grounding electrode conductor and connector are in conformance with the 1996 National Electrical Code.

REMARKS

Herewith is submitted a Reissue Application for U.S. Pat. 5,912,434. New Claims 8-11 have been added. In the course of preparation it was noted that there were some minor inadvertent errors in the specification that have also been corrected.

In the Drawings

The correction to the Drawings is shown in red. In Fig. 2 the indents have been numbered as 12a. In Fig.3, reference characters 16a(arms), 17a(tooth) and 17b(groove) have been added. In the Specification

In page 2, line 18, after "press" --cylindrical-- has been added.

line 24, "therto" has been changed to --thereto--.

line 26, after "sleeve" --as shown at 12a-- has been added.

Respectfully Submitted,

Wayne Robinson, Applicant

By: Robert Halber


Attorney for Applicant

Reg. No. 30,536


RH/ah

Ph. 301-572-2089; Fax 301-572-4719



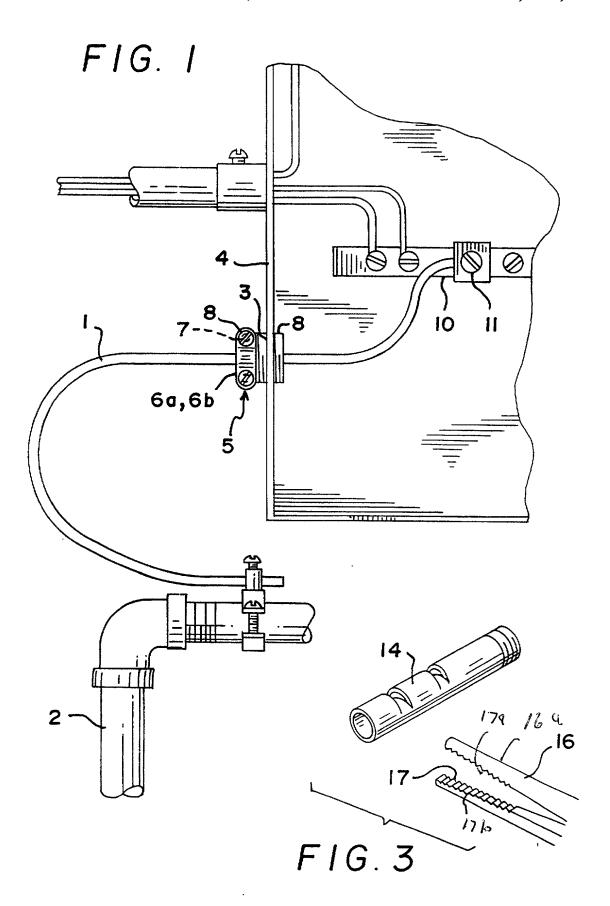



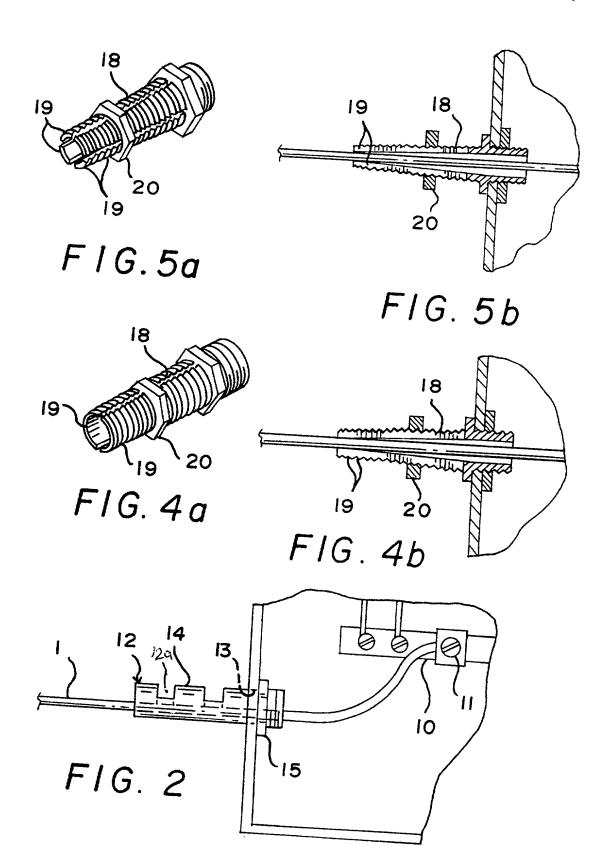

OR

□ Declaration

Submitted after Initial

Filing (surcharge (37 CFR 1.16 (e))

· 🔞	Please type a plus sign (+) inside t
三 切	Under the Paperwork Redu
₹ 3	a valid OMB control number
	DECLARATION E
≣ .~	DECLARATION F

□ Declaration

Submitted

with Initial Filing

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE action Act of 1995, no persons are required to respond to a collection of information unless it contains SUE **Attorney Docket Number** ON FOR UTILITY OR First Named Inventor **DESIGN** PATENT APPLICATION **COMPLETE IF KNOWN** (37 CFR 1.63) **Application Number** 2000 Filing Date

Group Art Unit

Examiner Name

	required)				
-				-	
As a below named inve	ntor, I hereby declare that:			W	
My residence, post office	address, and citizenship are	as stated below next to m	y rame.		
I believe I am the onginal	i, first and sole inventor (if on	ly one name is listed below	/) or an original.	first and joint inventor (if plural	
names are listed below)	of the subject matter which is	claimed and for which a pa	atent is sought o	n the invention entitled	
Ke	MAY CLAM	2			
the specification of whic	h <i>(Ти</i>	le of the Invention)		•	
is attached hereto	•				
was filed on (MM/I	mac	as Unite	ed States Applica	ation Number or PCT international	
Application Number				-	
		ras amended on (MM/DD/Y		(f applicable).	
amended by any amendm	eviewed and understand the ent specifically referred to abo	Contents of the above men ove.	ittied specificatio	on, including the claims, as	
I acknowledge the duty to	disclose information which is	material to patentability as	defined in 37 Cl	FR 1.56.	
I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed					
Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO	
	;				
Additional foreign applica	ation numbers are listed on a	supplemental priority data	sheet PTO/SB/0	12B attached hereto	
I hereby claim the benefit u	under 35 U.S.C. 119(e) of any	United States provisional	application(s) lis	ted below	
Application Number	(s) Filing Date	(MWDD/YYYY)			
			Addition	onal provisional application	
				ers are listed on a	
			• • •	mental priority data sheet BB/02B attached hereto.	
		1		Diozo diagnos nereto.	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a	plus sign (+) inside	this box	->	4

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Traderrark Office; U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless at contains a valid OMB control number a valid OMB control number.

DECLARATION — Utility or Design Patent Application

United States United States information wi	the benefit under 35 U.S.C. 120 of America, listed below and, in or PCT International application in nich is material to patentability an al or PCT international filing date	sofar as the subject matt n the manner provided by s defined in 37 CFR 1.56	er of e	ach of the ciairns t paragraph of 35	of this appl U.S.C. 112.	lication is . I acknov	s not disclose wiedge the di	ed in the pho uty to disclosi
U.	S. Parent Application or	PCT Parent	Pa	rent Filing D	ate		nt Patent	
	Number		1	MM/DD/YYY	0		(if applica	able)
	U.S. or PCT international applica							
	entor, I hereby appoint the follow Office connected therewith:		(s) to p	rosecute this appl	ication and t	to transac	ct all busines. Place Cus	
and maddinan	_	Customer Number COR					Number Ba	r Code
		Registered practitioner(s) name	registration numb	er listed bei	ow L	<u>Labelh</u>	
i	Name	Registration Number			Name			istration umber
Rober	+ Hulper	30,536						
Additional r	registered practitioner(s) named o	n supplemental Registere	d Prac	itioner Information	sheet PTO	/SB/02C	attached her	eta.
Direct all corre		ner Number Code Label		0	R 🕶 C	orrespo	ndence add	iress below
Name	Robert	He 1001	/					
Address	3118 Cal	lecton 1	31	vd				
Address								
City	Belts !!		SI	ate Md	ZIP	2	.0705	<u></u>
Country	USA	Telephone 301				301-		4719
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.								
Name of So	le or First Inventor:		□ A	petition has be	en filed for	r this un	signea inve	entor
Giv	ven Name (first and middle [if	anyi)		Fa	nily Name	or Sum	ame	
WAYne	HArrison]	Robin	50 7	_		
Inventor's Signature	Walpe A	arrison Ko	ben	son			Date	7/12/00
Residence: C	my Lothian	State Md	/ c	untry Anna	Aver	rder	Citizenship	03
Post Office Ad	dress 67/ 7	ETON D	_					
Post Office Ad	idress							
City	Lothian State	md/ ZIP	2	0711	Cour	ntry	USA	
☐Additional i	nventors are being named or	the supplementa	ıl Addi	tional Inventor(s	s) sheet(s)	PTO/SE	B/02A attac	hed hereto

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

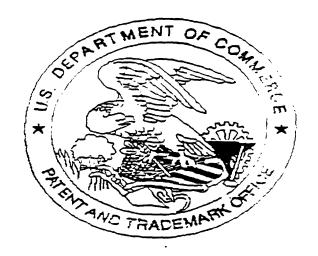



application delicienci	es were round	a during scanning:	
☐ Page(s)for scanning.	of IRAn	(Document title)	were not present
☐ Page(s)for scanning.	_ of	(Document title)	were not present
☐ Scanned copy is	besi availabli	e.	